

“SMART” LED WALLPACK

Integrated Controls Solution

MHTL-WPAH SMART SERIES


Project _____

Part No. _____

Quantity _____

- Maximize efficiency, save on-site labor costs and controls coordination headaches. MHT's fully integrated photocontrol, occupancy sensor and dimming ability can save up to 90% in energy costs! Making it the “Smart” Solution.

- Our proven “Smart” LED solutions offer incredible value, proven reliability and are backed by our 10-year warranty.

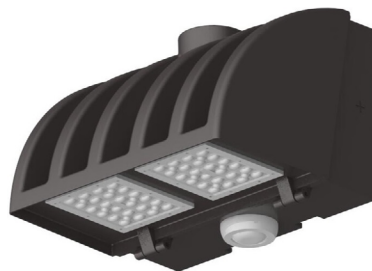

APPLICATIONS

- Building Exterior
- Parking Garage
- Security Lighting
- Walkway



FEATURES

- Integrated Photocontrol that Turns OFF Lighting When Sufficient Daylight is Available
- Integrated Motion Sensor that Reduces Light Output When An Area is Unoccupied
- Dimming Range Between 10% and 50% When Motion is Not Detected
- Different Lens Options for up to 20ft Mounting Height and 40ft Diameter Coverage
- Optional Remote Control for On-Site Motion Sensor Adjustment
- L80 > 100,000 Hours; Title 24 Compliant
- Die Cast Aluminum Housing (Dark Bronze or Black)
- High Performance Acrylic Optical Lens
- Fixture Protection Class IP65
- Type III or Type IV Distribution

LED/DRIVER

- Standard Input Voltage 120/277V
- Power Factor > 0.96 @277V
- THD < 15% @277V
- Color Temperature 3000K/4000K/5000K
- 6kV Surge Protection - Optional 20kV
- CRI > 75

Model	Input Power	Lumen	Dimensions
MHTL-WPAH-20E-4K-U	20W	>2,300	11.5" x 10" x 9.6"
MHTL-WPAH-60E-4K-U	60W	>6,900	11.5" x 10" x 9.6"
MHTL-WPAH-72E-4K-U	72W	>8,200	11.5" x 10" x 9.6"
MHTL-WPAH-100E-4K-U	100W	>11,500	11.5" x 10" x 9.6"
MHTL-WPAH-120E-4K-U	120W	>14,000	11.5" x 10" x 9.6"
MHTL-WPAH-150E-4K-U	150W	>18,000	18" x 10" x 9.6"
MHTL-WPAH-200E-4K-U	200W	>24,000	18" x 10" x 9.6"



Manufactured in the USA

Toll Free **888-511-7780** • www.mhtlighting.com



