


**1. Main Data:**

Fixture Model	Lamp Type	Input Voltage	Input Wattage	Input Current	Ballast Model	Power Factor	Net Weight (lbs)
MHT-CL-40E	RT40W	120-277V AC 50/60Hz	42W	0.35~0.15A	MHTST-40-U	≥0.95	8.7
MHT-CL-55E	RT55W		58W	0.49~0.21A	MHTST-55-U		8.7
MHT-CL-70E	RT70W		74W	0.61~0.27A	MHTST-70-U		9.4
MHT-CL-80E	RT80W		84W	0.70~0.30A	MHTST-80-U		9.8
MHT-CL-100E	RT100W		105W	0.88~0.38A	MHTST-100		10.0

**2. Dimensions: inch(mm) (Standard Ceiling Surface Mount, Optional Pendant or Hook Mount)**

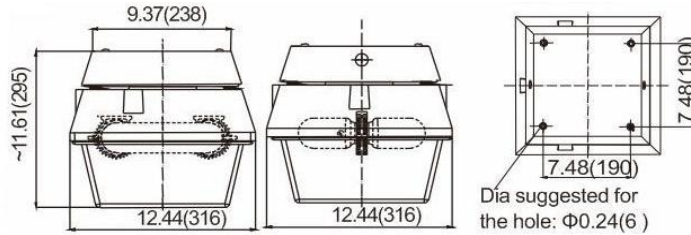

**3. Installation and Maintenance Instructions:**

- 3.1 This product is to be installed and serviced by a certified electrician.
- 3.2 Maintenance is to be performed when the power is off and the lamp has cooled down.
- 3.3 This product should be installed in an area with good ventilation, clear of any corrosive or combustible gases and explosive objects.
- 3.4 A supply voltage tolerance of +/- 10% is allowable, and improper installation outside of this range will influence the normal operation of this luminaire and result in damage to the lamp and electronic ballast.
- 3.5 This product must be properly grounded to prevent accidental electrical shocks, and to prevent interference from the electrical ballast affecting the normal operation of the luminaire.

