LED DARKSKY WALLPACK MHTL-DSWP-XC SERIES

Project	
Part Number_	
Quantity	




FEATURES

- >100,000 Hours Rated Lifespan
- 10-year Warranty
- L90 > 90,000 Hours (38W); L90 > 49,000 Hours (76W)
- Die Cast Aluminum Housing (Dark Bronze)
- Standard Flat Clear Tempered Glass Lens
- Optional Polycarbonate Lens Impact Resistant
- High Performance Acrylic Optical Lens Type III or IV
- Full Cutoff Dark Sky Compliant
- Available Integrated Emergency Battery Backup
- Available Integrated Occupancy Sensor See "Smart" Series

LED/DRIVER

- Universal Input Voltage 120 277V
- Optional Input Voltage 347V/48OV
- Power Factor > 0.93 @277V
- THD < 20% @277V



APPLICATIONS

- Building Exterior
- Parking Garage
- Security Lighting
- Walkway









- O-10V Dimmable Driver
- Color Temperature 4000K/5000K
- CRI > 75
- Surge Protection


Model	Input Power	Lumen	CCT	Dimensions
MHTL-DSWP-XC-38E-5K-U	38W	>4,200	5000K	14.25" x 12.13" x 9.17"
MHTL-DSWP-XC-45E-5K-U	45W	>5,000	5000K	14.25" x 12.13" x 9.17"
MHTL-DSWP-XC-76E-5K-U	76W	>8,200	5000K	18.23" x 14.65" x 9.13"



LED DARKSKY WALLPACK MHTL-DSWP-XC SERIES


Project	
Part Number_	
Quantity	

ORDERING CODES

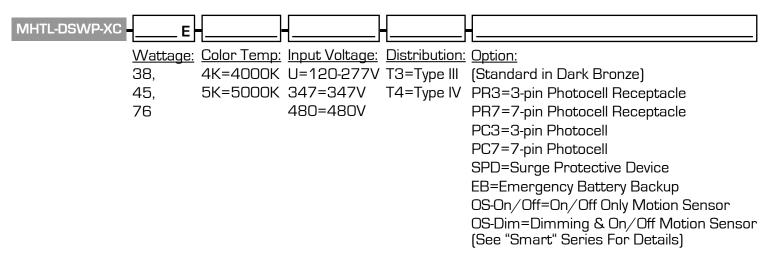

MHTL-DSWP-38E and MHTL-DSWP-76E in 4000K are DLC Listed Product

DIMENSIONS

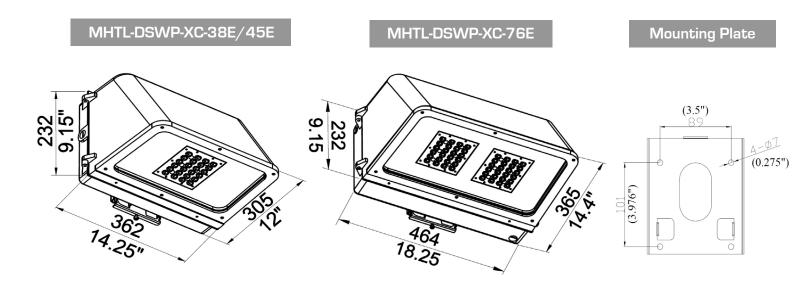

- Mounting Plate Bolt Patterns: 3 1/2" X 4"; Hole Size: 1/4"

- MHT Products are ETL Listed and Assembled in ISO9000/1 Certified US Facility
- MHT Lighting Offers a 10-year Warranty (See Warranty Terms and Conditions)
- Every Product is Quality Tested and Inspected Prior to Shipment
- Proudly Manufactured in the USA
- For Product IES Files Please Contact Your Local Reps

WHT Plant Operations 1961 Richmond Terrace Staten Island, New York 10302 Tel: (718) 524-4370 Fax: (718) 524-4390