



mhtlighting
illuminating PoE technology




MHTL-PAN-SG

LED PANEL SERIES

FEATURES

- Access Box On Top with 1/2" Knock-outs
- No Glare and Full Even Light Distribution
- Available Ceiling Surface Mount Kit or Recessed Drywall Kit
- Available Remote Mounted Emergency Battery Backup (Field Installed is Required)
- 0-10V Dimmable Driver


GENERAL INFORMATION

Applications	Conference/Meeting Room / Commerical Building / Healthcare / Office and School
Warranty	5-year Warranty
Construction	Aluminum and Steel Construction High Performance Diffuser
Certifications	  

PRODUCT DATA

Universal Input Voltage	120 - 277V
Power Factor	> 0.95 @277V
Mounting	Standard Ceiling Grid Mount with Cable Mount Hooks
Lumens	4,500
Max Input Power	1x4 and 2x2, 40 Watts & 2x4, 52 Watts
CRI	> 80
CCT	4000/5000K
L70	> 60,000 Hours
Rated Lifespan	> 100,000 Hours
THD	< 15% @277V

DIMENSIONS

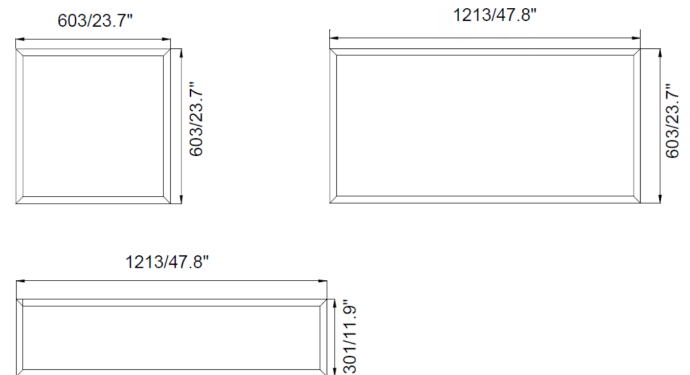

FIXTURE PERFORMANCE

Model	Input Power	Lm/W	Lumen	Dimensions
MHTL-PAN-SG-2X2-30E-4K	30W	125	3,750	23.7" x 23.7" x 1.6"
MHTL-PAN-SG-2X2-40E-4K	40W	125	5,000	23.7" x 23.7" x 1.6"
MHTL-PAN-SG-2X4-52E-4K	52W	125	6,500	23.7" x 47.8" x 1.6"
MHTL-PAN-SG-1X4-36E-4K	36W	125	4,500	11.9" x 47.8" x 1.6"

ORDERING INFO: Sample Code - MHTL-PAN-SG

Series	Wattage	Color Temperature	Input Voltage	Mounting	Options
MHTL-PAN-SG					
MHTL-PAN-SG	2X2-30E 2X2-40E 1X4-36E 2X4-52E	4K=4000K 5K=5000K	U=120-277V	SM=Flush Surface Mount Kit DK=Recessed Drywall Kit	(Blank) - Standard in White SPD=20kV Surge Protective Device 90CRI=90 CRI EM=Emergency Battery Backup