



## MHTL-WRP

### LED WRAP FIXTURE SERIES

#### FEATURES

- Optional Motion Sensor (Attach to the Side of the Fixture)
- Standard 4kV Surge Protection
- 0-10V Dimmable LED Driver
- Operating Frequency 50Hz/60Hz


#### GENERAL INFORMATION

Applications	Education and Retail / Healthcare / Parking Garage / Stairwell and Passageway
Warranty	10-Year Warranty
Construction	Die-form Steel Housing (White) Frosted Finish Acrylic Lens Highly Reflective White Coating
Certifications	   

#### PRODUCT DATA

Universal Input Voltage	120 - 277V
Optional Input Voltage	347V/480V
Power Factor	> 0.90 @277V
Mounting	Standard Surface Mount Ready
Lumens	6,200 Lumens
Max Input Power	48W
CRI	> 80
CCT	3500K/4000K/5000K
L70	> 60,000 Hours
Rated Lifespan	> 100,000 Hours
THD	< 20% @277V

#### DIMENSIONS

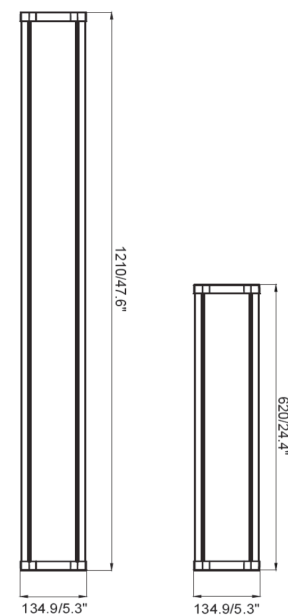

#### FIXTURE PERFORMANCE

Model	Input Power	Color Temp	Lumens	Dimensions
MHTL-WRP-2FT-20E-4K-U	20W	4000K	2,600	24.4" x 5.3" x 2.1"
MHTL-WRP-4FT-32E-4K-U	32W	4000K	4,100	47.6" x 5.3" x 2.1"
MHTL-WRP-4FT-40E-4K-U	40W	4000K	5,200	47.6" x 5.3" x 2.1"
MHTL-WRP-4FT-48E-4K-U	48W	4000K	6,200	47.6" x 5.3" x 2.1"

#### ORDERING INFO: Sample Code - MHTL-WRP-2FT-20-35K-U-SM-OS-Dim

Series	Size & Wattage	Color Temperatures	Input Voltage	Mounting	Options
MHTL-WRP			U		
MHTL-WRP	2FT-20 4FT-32 4FT-40 4FT-48	35K=3500K 4K=4000K 5K=5000K	U=120-277V	SM=Surface CM=Chain Ready	(Blank) - Standard in White OS-On/Off=On/Off Motion Sensor OS-Dim=Dimming Motion Sensor