

Project	Type	Notes



MHTi-WS-100

The inspeXtor platform is a **PoE Lighting Management System** providing building automation and data collection. PoE systems are safe and efficient low voltage platform

FEATURES

- Allows Manual Control of Fixtures on a MHTi Based communication network
- Ability to control fixtures throughout the network via patented tagging System
- Designed for installation Via Cat6 cable to the closest node
- Controllable functions Include: On, Off, Up, Down, with three scene buttons available*
- Designed for easy installation into standard gang boxes
- Comes in 4 or 7 button configurations


GENERAL INFORMATION

Applications	Commercial, Hospitals and Health Care, Residential, Education & Industrial		
Warranty	5 Year Limited Warranty (Covers Standard Components)		
Finish	White Powder Coating		
Certifications			

PRODUCT DATA

Power Consumption	0.1W	Max wire length wall switch to node	35 feet
Operating Temperature	0°C to 50°C	Response Time	0.1 Sec
Input Voltage	14 Vdc	Connection Type	R45
Dimensions	4.04" (L) X 1.73" (W) X 1.10" (D)	Data Rate	150 byte/sec

DIMENSIONS

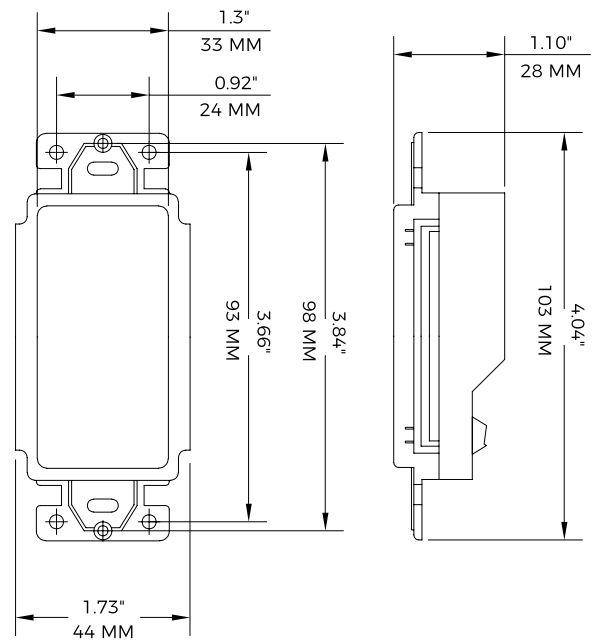

ORDERING INFO:

Sample Code - MHTi- WS-100-4B-W

Series	Size	Color
WS-100		W
WS-100	4B	W - White
	7B	

* 7 button version only



1961 Richmond Terrace, Staten Island, NY 10302, USA
Tel: 718 524 4370

www.mhtlighting.com

MHT Lighting, reserves the right to make any design changes for continuous improvement which will not affect the overall appearance or performance.