

LED DUSK TO DAWN

MHTL-DTD-XC SERIES

Project _____

Part Number _____

Quantity _____



APPLICATIONS

- Street Lighting
- Intersections
- Parking Lots
- Public Areas

FEATURES


- >100,000 Hours Rated Lifespan
- 10-year Warranty
- Die Cast Aluminum Housing (Bronze)
- Standard Clear PC Lens - Optional Diffused Lens
- Compact Size, Light Weight, Tool-free Maintenance
- Fits O.D. 1.25" to 2.36" Round Pole
- Available in Type II, Type III or Type V Distribution
- Fixture Protection Class IP65 Rated
- Ambient Temperature -30 to 120 °F



SPECIFICATION

- Universal Input Voltage 120 - 277V
- Operating Frequency 50Hz/60Hz
- Power Factor > 0.95
- Color Temperature 3000K/4000K/5000K
- CRI > 80
- 5kV Surge Protection

Model	Input Power	Lm/W	Lumen	Dimensions (w/ PC)	Weight	EPA (ft ²)
MHTL-DTD-XC-30E-4K-U	30W	96	2,800	17.8" x 8.1" x 5.8"	6 lbs	0.5
MHTL-DTD-XC-50E-4K-U	50W	96	5,400	17.8" x 8.1" x 5.8"	6 lbs	0.5

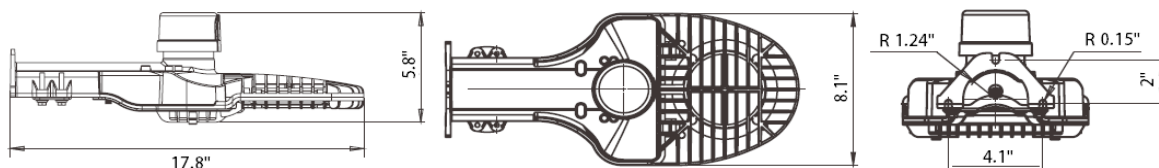

ORDERING CODES

MHTL-DTD-XC	<u> </u> E <u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>
	Wattage:	Color Temperature:	Input Voltage:	Distribution:	Option:
	30, 50	3K=3000K 4K=4000K 5K=5000K	U=120-277V	T2=Type II T3=Type III T5=Type V	PR3=3-pin Photocell Receptacle PR7=7-pin Photocell Receptacle PC3=3-pin Photocell PC7=7-pin Photocell DB=0-10V Dimmable Driver

MHTL-DTD-50E-4K-U-T3 is a DLC Listed Product

- MHT Products are UL Listed and Assembled in ISO9000/1 Certified US Facility
- Every Product is Quality Tested and Inspected Prior to Shipment
- Proudly Manufactured in the USA
- For Product IES Files Please Contact Your Local Reps



Manufactured in the USA

MHT Plant Operations

1961 Richmond Terrace
Staten Island, New York 10302
Tel: (718) 524-4370
Fax: (718) 524-4390

West Coast Operations

2285 Michael Faraday Dr. Suite 10
San Diego, California 92154
Tel: (619) 661-0600

www.mhtlighting.com

888-511-7780

MHT Confidential
Rev Date: December 201