

LED SHOEBOX

MHTL-SB-PRM-XC SERIES

Project _____

Part Number _____

Quantity _____



APPLICATIONS

- All Area/Flood Applications
- Parking Lot
- Park

FEATURES

- >100,000 Hours Rated Lifespan
- 10-year Warranty
- L70 > 100,000 Hours
- Die Cast Magnesium Aluminum Housing (Bronze)
- High Performance Acrylic Optical Lens
- Nichia LEDs and Meanwell Driver
- Lightweight and Compact Design - 14 lbs
- Fixture Protection Class IP66
- Type II, III, IV or V Light Distribution
- Straight Arm, Swivel or Slip Fitter Mount
- Ambient Temperature -30 to 120 °F



LED/DRIVER

- Universal Input Voltage 120~277V
- Optional Input Voltage 347V/480V
- Power Factor > 0.95 @277V
- THD < 15 % @277V
- Surge Protection - Optional 20kV SPD
- Color Temperature 4000K/5000K
- CRI > 80
- 1-10V Dimmable Driver

Model	Input Power	Lm/W	Lumen	Dimensions	EPA at 0° (ft²)
MHTL-SB-PRM-XC-100E-4K-U	100W	150	15,000	17.4" x 15" x 3.3"	1.8
MHTL-SB-PRM-XC-120E-4K-U	120W	150	18,000	17.4" x 15" x 3.3"	1.8
MHTL-SB-PRM-XC-150E-4K-U	150W	150	22,000	17.4" x 15" x 3.3"	1.8
MHTL-SB-PRM-XC-180E-4K-U	180W	150	27,000	17.4" x 15" x 3.3"	1.8
MHTL-SB-PRM-XC-200E-4K-U	200W	150	30,000	17.4" x 15" x 3.3"	1.8



Manufactured in the USA

Toll Free **888-511-7780** • www.mhtlighting.com



LED SHOEBOX

MHTL-SB-PRM-XC SERIES

Project _____


Part Number _____

Quantity _____

ORDERING CODES

MHTL-SB-PRM-XC	E					
Wattage:	Color Temp:	Input Voltage:	Distribution:	Mounting:	Option:	
100,	4K=4000K	U=120-277V	T2=Type II	EA6R=6" Arm (For Round Pole)	(Standard in Dark Bronze)	
120,	5K=5000K	347=347V	T3=Type III	EA6S=6" Arm (For Square Pole)	PR3=3-pin Photocell Receptacle	
150,		480=480V	T4=Type IV	SF=Slip Fitter	PR7=7-pin Photocell Receptacle	
180,			T5=Type V	SW=Swivel Mount	PC3=3-pin Photocell	
200					PC7=7-pin Photocell	
					SC=Shorting Cap	
					SPD=Surge Protective Device	
					OS-On/Off=On/Off Motion Sensor	
					OS-Dim=Dimming Motion Sensor (See "Smart" Series for Details)	

DIMENSIONS

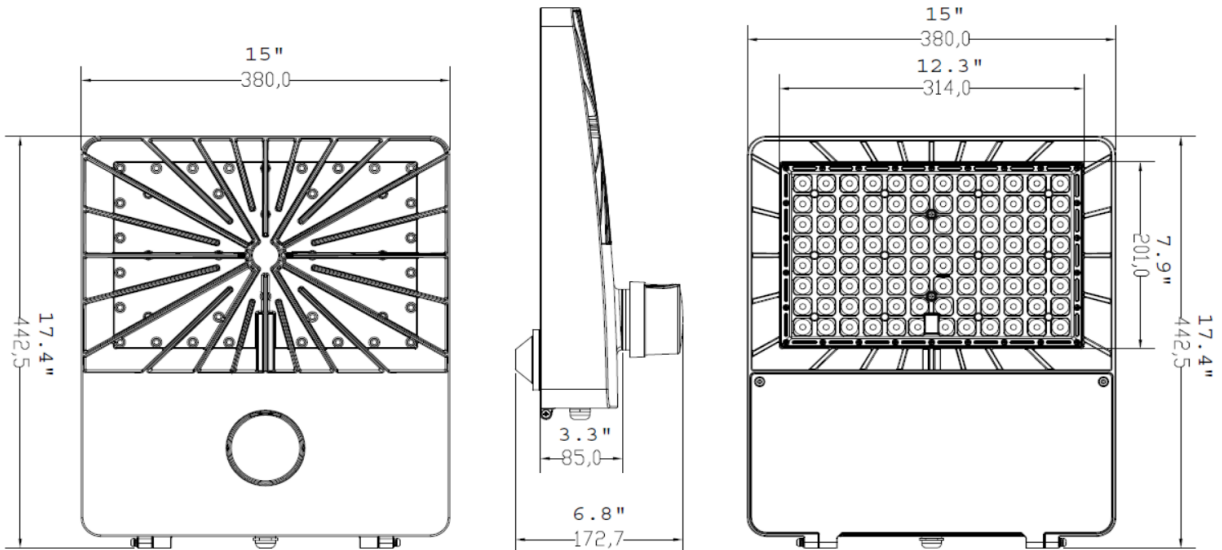

EA6S - 6" Extruded Arm For Square Pole
(Non-Adjustable. 1ft Cord is Included)



SF - Slip Fitter Mount
(Adjustable. 1ft Leads are Included)



EA6R - 6" Extruded Arm For Round Pole
(Non-Adjustable. 1ft Cord is Included)



SW - Swivel Mount Bracket
(Adjustable. 1ft Leads are Included)

- MHT Products are UL Listed and Assembled in ISO9000/1 Certified US Facility
- MHT Lighting Offers a 10-year Warranty (See Warranty Terms and Conditions)
- Every Product is Quality Tested and Inspected Prior to Shipment
- Proudly Manufactured in the USA
- For Product IES Files Please Contact Your Local Reps

MHT Plant Operations

1961 Richmond Terrace
Staten Island, New York 10302
Tel: (718) 524-4370
Fax: (718) 524-4390

West Coast Operations

2285 Michael Faraday Dr. Suite 10
San Diego, California 92154
Tel: (619) 661-0600

www.mhtlighting.com

888-511-7780

MHT Confidential
Rev Date: December 2017