

ALUMINUM LOW BAY (Wet Location) LBa-WL-XC SERIES

Project _____
Part Number _____
Quantity _____



APPLICATIONS

- Food Processing
- Exterior Canopies
- Car Washes
- Toll Booths
- Loading Docks
- Service Centers

FEATURES

- >100,000 Hours Rated Lifespan (IESNA)
- 10-year or 60,000 Hours Warranty
- Die Cast Aluminum Gear Box (White)
- Swivel Clip Water-Proof Design
- Includes Safety Cable Connecting Hood to Gear Box
- Anti-Rust Stainless Steel Fasteners
- Tempered Flat Glass Lens
- Hook or 3/4" Pendant Installation (Optional 1/2")
- Fixture Protection Class IP65
- CB and SII Certified For 200W Model
- Ambient Temperature -20 to 120 °F (Consistent Extremes Do Not Apply)



LAMP/BALLAST

- 120 - 277V Universal Input Voltage
- Optional 347V or 480V
- Instant-On, Flicker Free, Minimum Light Loss
- 0-10V Dimming Ballast - Minimum 40%
- 100W - 200W Round Tubular Lamp Design
- Color Temperature 3000K/4000K/5000K
- CRI > 85 - Excellent Color Rendition
- Power Factor > 0.95, THD < 10%

Model	Rated Wattage	Input Wattage	Replaces	Lamp Lm/W	Lamp Lumen	Size	IP Rating	Lens
MHT-LBa-WL-XC-100E	100W	105W	MH - 175W HPS - 200W	82-85	8,400	24"	65	Flat Glass
MHT-LBa-WL-XC-120E	120W	126W	MH - 200W HPS - 200W	82-85	10,080			
MHT-LBa-WL-XC-150E	150W	158W	MH - 250W HPS - 310W	82-85	12,600			
MHT-LBa-WL-XC-200E	200W	210W	MH - 400W HPS - 400W	82-85	16,800			



Manufactured in the USA

Toll Free **888-511-7780** • www.mhtlighting.com



ALUMINUM LOW BAY (Wet Location)

LBa-WL-XC SERIES


Project _____
 Part Number _____
 Quantity _____

ORDERING CODES

MHT-LBa-WL-XC - E - - -

<u>Wattage:</u>	<u>Color Temp:</u>	<u>Input Voltage:</u>	<u>Option:</u>
100, 120,	3K=3000K	U=120~277V	(Standard in Dark Grey Top)
150, 200	4K=4000K	347=208~347V	CP=Cord & Plug (Specify Cord & Plug)
	5K=5000K	480=480V	WG=Wire Guard
			AC=Aircraft Cable
			DB=0-10V Dimming Ballast (Minimum 40%)
			OS-Dim=Dimming Base On Motion
			OS-ON/OFF=ON/OFF Base On Motion
			NF=Nanoflex Reflector
			SPD=Surge Protective Device

DIMENSIONS

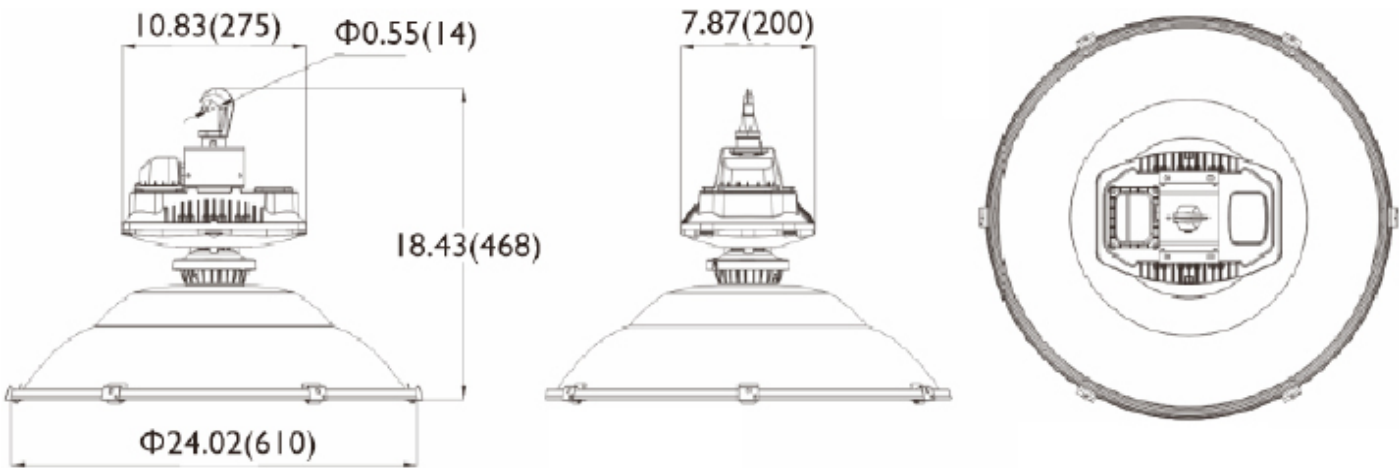

*3/4" or 1/2" Pendant Mounting Available

- MHT Products are UL Listed and Assembled in ISO9000/1 Certified US Facility
- Every Product is Quality Tested and Inspected Prior to Shipment
- MHT Lighting Offers a 10-year or 60,000 Hours Warranty (See Warranty Terms and Conditions)
- Proudly Manufactured in the USA
- For Product IES Files Please Contact Your Local Rep

MHT Plant Operations
 1961 Richmond Terrace
 Staten Island, New York 10302
 Tel: (718) 524-4370
 Fax: (718) 524-4390

West Coast Operations
 2285 Michael Faraday Dr. Suite 10
 San Diego, California 92154
 Tel: (619) 661-0600

www.mhtlighting.com
888-511-7780

MHT Confidential
 Rev Date: December 2017