

# LED POLYCARBONATE HIGH BAY

## MHTL-HB-XC SERIES

Project \_\_\_\_\_

Part Number \_\_\_\_\_

Quantity \_\_\_\_\_

### APPLICATIONS

- Convention Center
- Gymnasium
- Manufacturing
- Warehouse



### FEATURES

- >100,000 Hours Rated Lifespan
- 10-year Warranty
- L90 > 40,000 Hours
- Hook or 3/4" Pendant Mount
- Die Cast Driver and Wiring Compartments
- High Efficient Aluminum Liquid Heat Sink
- Prismatic Polycarbonate Diffuser - Glare Free & Impact Resistant
- Optional Prismatic Polycarbonate Lens - Glare Free & Impact Resistant
- Meets DLC Standards



### LED/DRIVER

- Universal Input Voltage 120 - 277V
- Optional Input Voltage 347V/480V
- Power Factor > 0.95 @277V
- THD < 15% @277V
- Color Temperature 3000K - 5000K
- CRI > 85
- Surge Protection
- 0-10V Dimmable Driver

Model	Input Power	Lumen	Lens	Dimensions (with Hook)
MHTL-HB-XC-110E-4K-U-PL	110W	12,000	Prismatic PC	Ø22.4" x 31.7"
MHTL-HB-XC-145E-4K-U-PL	145W	16,000	Prismatic PC	Ø22.4" x 31.7"
MHTL-HB-XC-195E-4K-U-PL	195W	21,000	Prismatic PC	Ø22.4" x 31.7"
MHTL-HB-XC-220E-4K-U-PL	220W	24,000	Prismatic PC	Ø22.4" x 31.7"
MHTL-HB-XC-255E-4K-U-PL	255W	28,000	Prismatic PC	Ø22.4" x 31.7"



Manufactured in the USA

Toll Free **888-511-7780** • [www.mhtlighting.com](http://www.mhtlighting.com)



# LED POLYCARBONATE HIGH BAY

## MHTL-HB-XC SERIES

Project \_\_\_\_\_

Part Number \_\_\_\_\_

Quantity \_\_\_\_\_


### ORDERING CODES

MHTL-HB-XC  E

Wattage: 110, 145, 195, 220, 255, 295, 340, 400  
Color Temp: 35K=3500K, 4K=4000K, 5K=5000K  
Input Voltage: U=120-277V, 347=347V, 480=480V  
Mounting: PM=Pendant (Standard 3/4")  
Lens: NL=No Lens, PL=PC Lens  
Option: (Standard in Silver)  
 CP=Cord & Plug (Specify Cord & Plug)  
 WG=Wire Guard  
 AC=Aircraft Cable  
 OS-On/Off=On/Off Only Motion Sensor  
 OS-Dim=Dimming & On/Off Motion Sensor (See "Smart" Series for Details)

MHTL-HB-110E-4K-U is a DLC listed Product

### DIMENSIONS

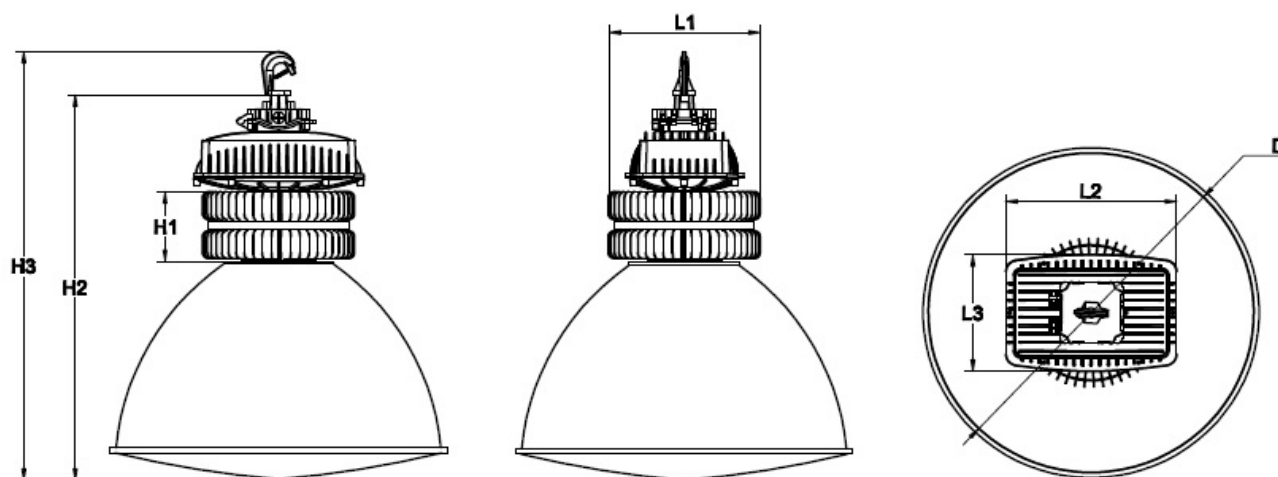

inch (mm)							
Wattage	L1	L2	L3	H1	H2	H3	D
110W	9.00 (229)	11.70 (298)	8.2 (209)	5.00 (127)	28.60 (727)	31.70 (806)	22.4 (569)
145W							
195W							
220W	10.40 (265)						
255W							

- MHT Products are ETL Listed and Assembled in ISO9000/1 Certified US Facility
- MHT Lighting Offers a 10-year Warranty (See Warranty Terms and Conditions)
- Every Product is Quality Tested and Inspected Prior to Shipment
- Proudly Manufactured in the USA
- For Product IES Files Please Contact Your Local Reps

**MHT Plant Operations**  
 1961 Richmond Terrace  
 Staten Island, New York 10302  
 Tel: (718) 524-4370  
 Fax: (718) 524-4390

**West Coast Operations**  
 2285 Michael Faraday Dr. Suite 10  
 San Diego, California 92154  
 Tel: (619) 661-0600

[www.mhtlighting.com](http://www.mhtlighting.com)  
**888-511-7780**

MHT Confidential  
 Rev Date: December 2017